

MS

**SERIES THREE-PHASE
ASYNCHRONOUS
MOTOR**

ALUMINUM HOUSING

IE2 IE3



INTRODUCTION :


- Conform to the IEC standard
- Be made of selected quality materials, latest design in entirety
- Good performance, low noise, little vibration, and safety and reliable operation
- Nice appearance, light weight
- Be maintained very conveniently, simple construction
- Be used for general drive

MOTOR FEATURES

- Utilise IP55 enclosures, other requests
- Multiple feet locations
- Aluminium frame, end shields and base
- High strength cable gland
- Shaft key and protector supplied
- Superior paint finish
- Motors made to heavy duty service factors
- Can be made with stainless steel shaft
- Motors made for continuous S1 duty
- Utilise Vacuum impregnated Class B or Class F insulation
- Others insulation on request
- High performance and efficiency

CUSTOMER BENEFITS

- Water dust and vermin resistant
- Quiet operation
- Electricity saving
- Easy installation (bolt on feet or brackets as required)
- Corrosion resistant
- Dependable
- Superior life
- Reliable in country, city or factory environments

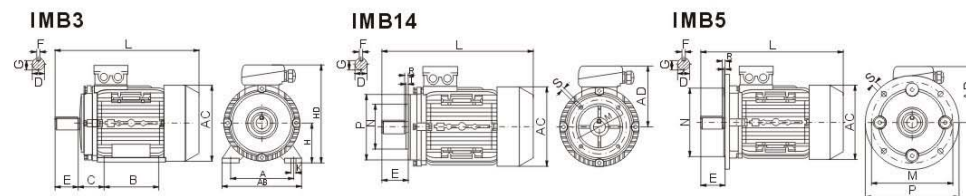

INSTALLATION SIZE AND OVERALL DIMENSION

Frame Size	Mounting Dimensions (mm)																									
	IMB14													IMB5						Frame Dimensions (mm)						
	A	B	C	D	E	F	G	H	K	M	N	P	R	S	T	M	N	P	R	S	T	AB	AC	AD	HD	L
56	90	71	36	9	20	3	7.2	56	5.8	65	50	80	0	M5	2.5	100	80	120	0	7	3	110	120	100	155	195
63	100	80	40	11	23	4	8.5	63	7	75	60	90	0	M5	2.5	115	95	140	0	10	3	125	130	100	165	215
71	112	90	45	14	30	5	11	71	7	85	70	105	0	M6	2.5	130	110	160	0	10	3.5	140	150	110	185	246
80	125	100	50	19	40	6	15.5	80	10	100	80	120	0	M6	3	165	130	200	0	12	3.5	160	170	135	215	285
90S	140	100	56	24	50	8	20	90	10	115	95	140	0	M8	3	165	130	200	0	12	3.5	178	185	137	226	335
90L	140	125	56	24	50	8	20	90	10	115	95	140	0	M8	3	165	130	200	0	12	3.5	178	185	137	226	335
100L	160	140	63	28	60	8	24	100	12	130	110	160	0	M8	3.5	215	180	250	0	15	4	206	206	150	250	376
112M	190	140	70	28	60	8	24	112	12	130	110	160	0	M8	3.5	215	180	250	0	15	4	222	228	170	285	400
132S	216	140	89	38	80	10	33	132	12	165	130	200	0	M10	4	265	230	300	0	15	4	257	267	190	325	460
132M	216	178	89	38	80	10	33	132	12	165	130	200	0	M10	4	265	230	300	0	15	4	257	267	190	325	500
160M	254	210	108	42	110	12	37	160	15	215	180	250	0	M12	4	300	250	350	0	15	5	320	330	255	420	615
160L	254	254	108	42	110	12	37	160	15	215	180	250	0	M12	4	300	250	350	0	15	5	320	330	255	420	675
180M	279	241	121	48	110	14	42.5	180	15	265	230	300	0	M15	4	300	250	350	0	19	5	355	380	280	455	700
180L	279	279	121	48	110	14	42.5	180	15	265	230	300	0	M15	4	300	250	350	0	19	5	355	380	280	455	740